

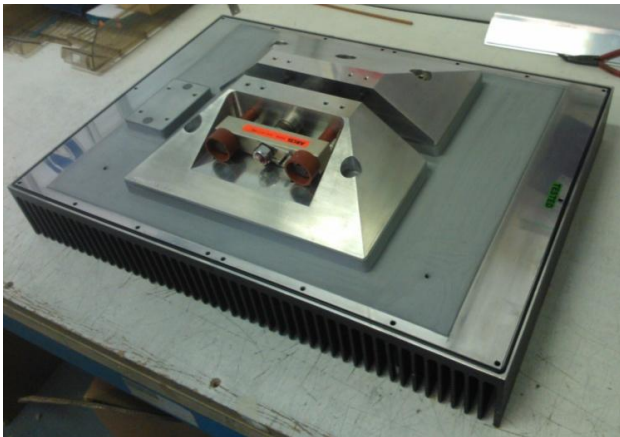
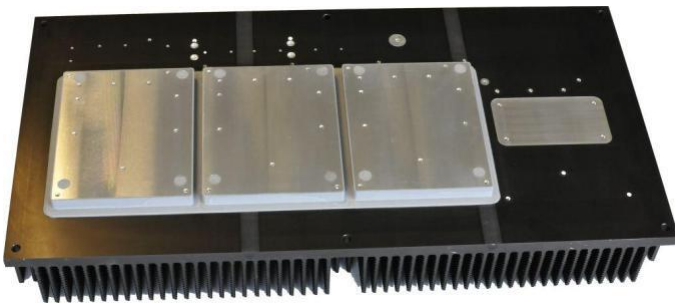


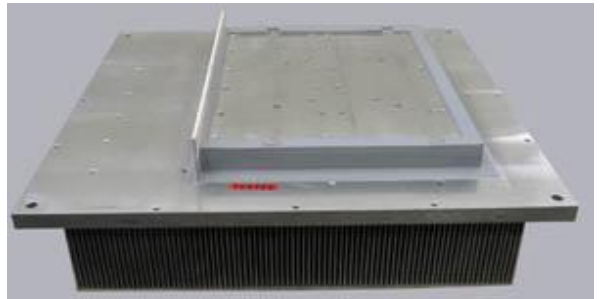

## INSULATED HEAT SINKS

### Main features

- Insulation up to 15kV (50Hz – 1 min)
- Temperature range : -50°C to +200°C
- Thermal conductivity : 1.1 to 2.1W/m.K
- 100% dielectric tested
- 100% partial discharges tested
- Fire / Smoke F0 I0 (NF16/101 – NF16/102 – STM S-001)
- Grey / black resin

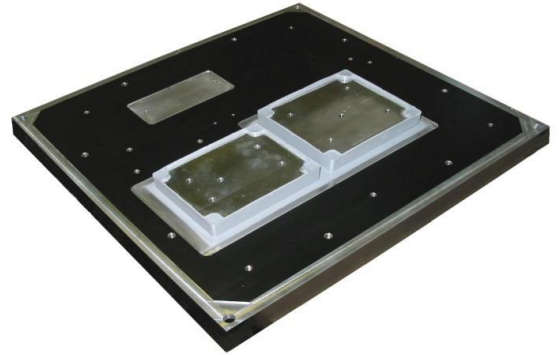

### Advantages

- Many shapes possible (custom to your needs)
- Soft resin : better resistance to vibration, no cracking
- Excellent adhesion to aluminum
- Handled vacuum process
- Many years of feed back
- Commonly used in railway